

MATERIALS & FEATURES

- HSS 1.9" steel tubing ASTM A53
- U-Lock Compatible

FINISH

- Galvanized
 Galvanized to ASTM A123/A123M-12
 Black Polyester Powder Coat



MOUNTING OPTIONS

- Surface Mount (**Anchors sold separately**)

SPACE USE RECOMMENDATIONS

- Wall Setbacks:
 For racks parallel to a wall
 Minimum: 24"
- For racks perpendicular to a wall
 Minimum: 34"
- Distance between racks
 Minimum: 24"
- Street Setbacks:
 For racks parallel to the street
 Minimum: 24"

*Suggested minimal clearances.

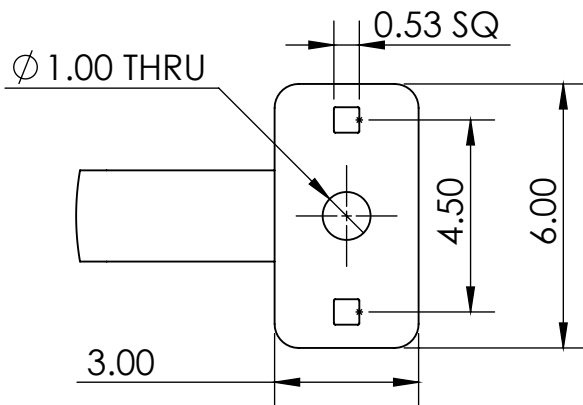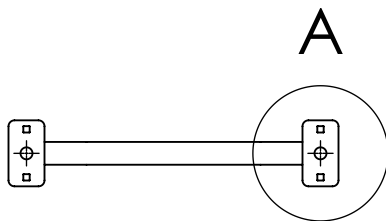

DETAIL A
 SCALE 1 : 4